


Model 4

Completely revised: Increased reliability, durability and installation convenience

Sturdy aluminium support for board and accessories



Previous positioners and position transmitters still upgradeable

Friction clutch prevents damage




Vibration-proof potentiometer suspension

Simple and securely locked connection to the valve stem*

Standard thread:
PSL 201–204 M12
PSL 208–214 M16

Other threads on request

*not for:
PSL 320/325




Precise valve setting:

- with fine adjustment of cams
- with stroke scale




Model 4

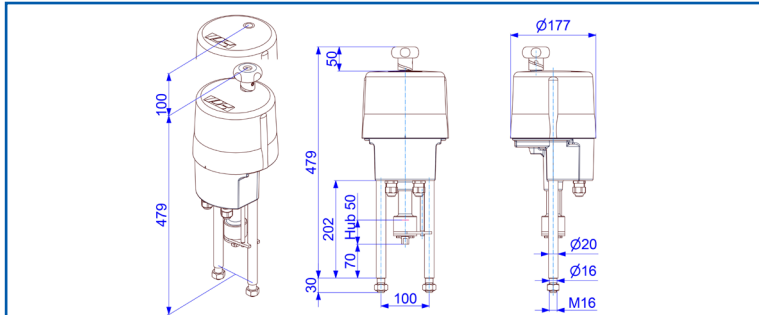


PSL 201-204

Max. force	1 kN - 4,5 kN
Actuator speed	0,25 - 1,4 mm/s
Stroke	max. 50 mm

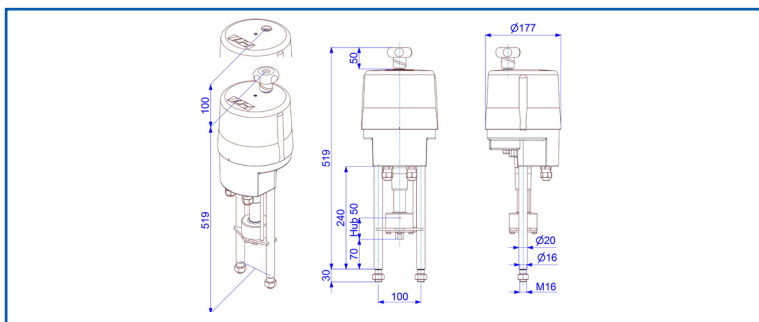


PSL 208-210

Max. force	8 kN - 10 kN
Actuator speed	0,35 - 1,0 mm/s
Stroke	max. 50 mm

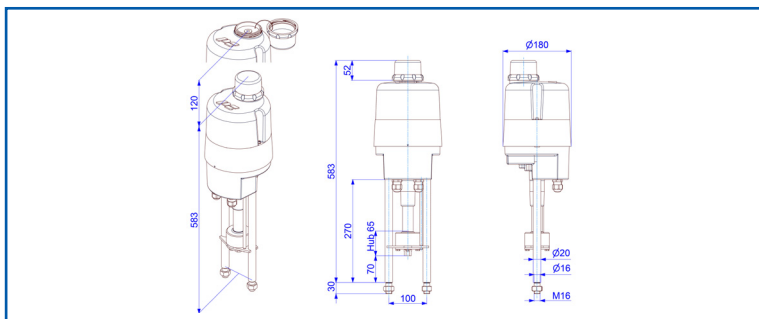

PSL 214

Max. force	14 kN
Actuator speed	0,45 mm/s
Stroke	max. 65 mm

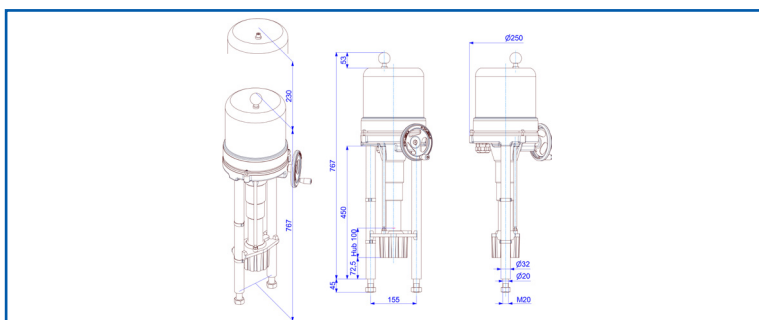

PSL 320-325

Max. force	20 kN - 25 kN
Actuator speed	1,0 mm/s
Stroke	max. 100 mm

PS Automation GmbH
Gesellschaft für Antriebstechnik

Philipp-Krämer-Ring 13 • D-67098 Bad Dürkheim
Tel.: +49 (0) 63 22-60 03-0 • Fax: +49 (0) 63 22-60 03-20
info@ps-automation.com • www.ps-automation.com

Engineered and Made in Germany

