


UM-3-1

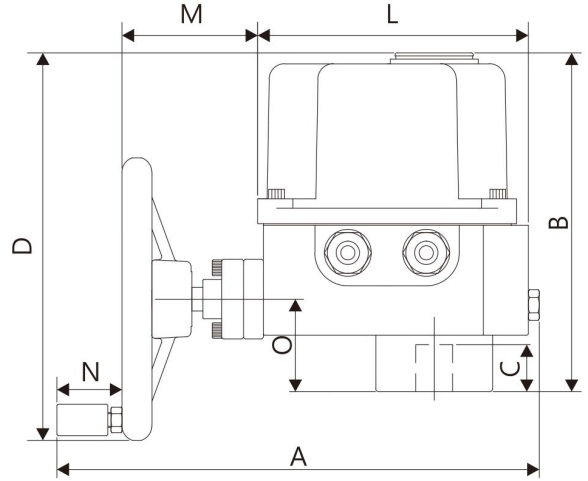


Product Specification

UM-3-1- 8 - AC110 - 25 - □ - □

- Model**
- Voltage**
AC220V(50/60)Hz
AC110V(50/60)Hz
DC24V
- Speed 90 sec(60Hz)**
- Power**
AC : 25W (Standard)
40W
60W
DC : 30W
- Extra Switches**
□ : Without Extra Switches (standard)
A : Extra Switches
- Heater**
□ : Without heater (standard)
H : Heater

AC : □ : 8sec (Standard)
1 : 1sec
DC : □ : 8sec (Standard)
1 : 1sec

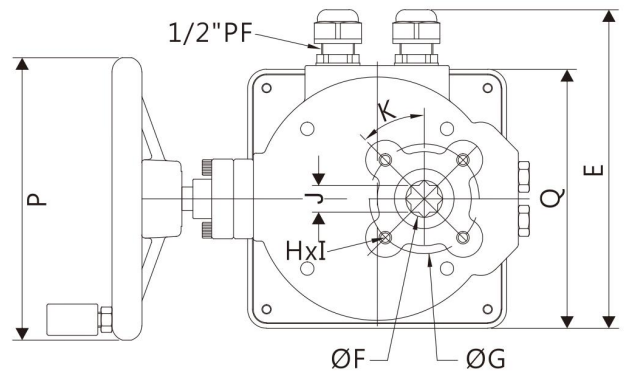

| | | | | | | | | | | | | | | | | | |
|--------|-----|-----|----|-----|-----|------|----|----|---|----------|-----|----|----|----|-----|-----|----------|
| mm | | | | | | | | | | | L | M | N | O | P | Q | ISO 5211 |
| | | | | | | | | | | | 173 | 85 | 65 | 59 | 120 | 165 | F07 |
| Model | A | B | C | D | E | F | G | H | I | J Max | K | | | | | | |
| UM-3-1 | 330 | 218 | 30 | 225 | 203 | 23.5 | 70 | M8 | 4 | 17.05 | 45° | | | | | | |

● For modulating series and DC voltage, B + 26mm.

| | | | | | | | | | | | | | | | | | |
|--------|----|------|------|------|------|------|------|----|---|----------|------|-----|------|------|------|-----|----------|
| inch | | | | | | | | | | | L | M | N | O | P | Q | ISO 5211 |
| | | | | | | | | | | | 6.81 | 3.4 | 2.55 | 2.32 | 4.72 | 6.5 | F07 |
| Model | A | B | C | D | E | F | G | H | I | J Max | K | | | | | | |
| UM-3-1 | 13 | 8.58 | 1.18 | 8.86 | 7.99 | 0.93 | 2.76 | M8 | 4 | 0.67 | 45° | | | | | | |

● For modulating series and DC voltage, B + 1.12inch.